


# Material Lifts

## Superlift Contractor™

### Specifications

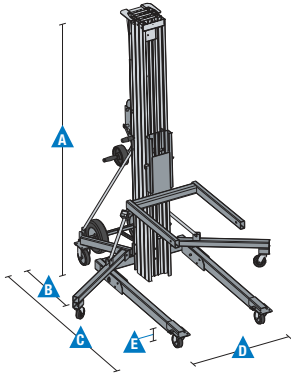

Models	SLC-12™		SLC-18		SLC-24	
Measurements	US	Metric	US	Metric	US	Metric
<b>Working height:</b>						
standard forks - forks down	11 ft 2 in	3.40 m	16 ft 9 in	5.10 m	22 ft 3 in	6.78 m
standard forks - forks up	12 ft 11 in	3.94 m	18 ft 6 in	5.64 m	24 ft	7.32 m
adjustable forks - forks down	11 ft 2 in	3.40 m	16 ft 9 in	5.10 m	22 ft 3 in	6.78 m
adjustable forks - forks up	12 ft 11 in	3.94 m	18 ft 6 in	5.64 m	24 ft	7.32 m
boom**	12 ft 2 in	3.70 m	17 ft 9 in	5.41 m	23 ft 3 in	7.10 m
<b>A</b> Height - stowed	7 ft 2 in	2.18 m	7 ft 2 in	2.18 m	7 ft 2 in	2.18 m
<b>B</b> Length - stowed	2 ft 10 in	.86 m	2 ft 10 in	.86 m	2 ft 10 in	.86 m
<b>C</b> - operating	5 ft 3 in	1.60 m	6 ft 1 in	1.85 m	6 ft 9 in	2.06 m
<b>D</b> Width - stowed*	2 ft 7.5 in	.80 m	2 ft 7.5 in	.80 m	2 ft 7.5 in	.80 m
- with stabilizers lowered	5 ft 6 in	1.68 m	5 ft 6 in	1.68 m	5 ft 6 in	1.68 m

### Productivity

#### Load capacity:

14 in (36 cm) load center	650 lbs	295 kg	650 lbs	295 kg	650 lbs	295 kg
24 in (61 cm) load center	425 lbs	193 kg	425 lbs	193 kg	425 lbs	193 kg
42 in (107 cm) load center	180 lbs	82 kg	160 lbs	73 kg	160 lbs	73 kg
<b>A</b> Ground clearance	2 in	.05 m	2 in	.05 m	2 in	.05 m
Load height minimum	6 in	.15 m	6 in	.15 m	6 in	.15 m

### Power

#### Average cranks:

standard winch	8.5 cranks/ft	27.8 cranks/m	8.5 cranks/ft	27.8 cranks/m	8.5 cranks/ft	27.8 cranks/m
----------------	---------------	---------------	---------------	---------------	---------------	---------------

### Weight

	225 lbs	102 kg	307 lbs	139 kg	347 lbs	157 kg
--	---------	--------	---------	--------	---------	--------

### Load Handling Attachments

Measurements	US	Metric	Weight - US	Weight - Metric
Standard forks assembly (l/w/d)***	28/23/2.5 in	71/58/6 cm	26.5 lbs.	12 kg
Adjustable forks assembly (l/w/d)***	27.5/12-30/2.5 in	70/30-76/6 cm	52.5 lbs.	24 kg
Fork extensions detached (each) (l/w/d)***	30/2/3 in	76/5/8 cm	4.5 lbs	2 kg
Boom (l/w/d)***	18-42/1.5/6 in	46-107/4/15 cm	39.9 lbs	18 kg
Load platform (l/w/d)***	26.3/23/2.5 in	67/58/6 cm	31.5 lbs	14 kg
Adjustable Forks Spacing	3 x 1.5 in	3 x 4 cm	4.5 lbs	2 kg

\* Outside dimensions.

\*\* Measured from ground to bottom of shackle.

\*\*\* Length/Width/Depth.

### Features

#### Standard Features

##### Measurements

###### SLC™-12

- 12 ft 11 in (3.94 m) maximum lifting height
- Up to 650 lbs (295 kg) lift capacity

###### SLC™-18

- 18 ft 6 in (5.64 m) maximum lifting height
- Up to 650 lbs (295 kg) lift capacity

###### SLC™-24

- 24 ft (7.32 m) maximum lifting height
- Up to 650 lbs (295 kg) lift capacity

##### Productivity

- Standard forks
- Heavy-duty design
- Strong, lightweight aluminum telescoping mast
- Single door access
- Quick set up requires no tools
- Interchangeable load handling attachments
- Non-marking 4 in (10 cm) front casters and 5 in (13 cm) rear casters with side brakes
- Rear transport wheel assembly
- Glide rails allow easy loading and unloading, on or off a vehicle, for transport
- Hold-down bar secures mast assembly during transport
- Captive stabilizer set (standard on SLC™-18, -24)
- Winch locks load in place

##### Power

- One speed manual winch

#### Options & Accessories

##### Productivity & Platform Options

- Boom
- Adjustable forks
- Fork extensions
- Pipe cradle (available aftermarket only)
- Load platform
- Stabilizer set (option on SLC™-12)
- Mast Brake

##### Power Options

- Two speed manual winch (available aftermarket only)

##### Base Options

- Standard base
- Stabilizer set



#### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Genie Europe

The Maltings  
Wharf Road  
Grantham NG31 6BH  
UK  
Telephone +44 (0)1476 584333  
Fax +44 (0)1476 584334  
Email: AWP-InfoEurope@terex.com

#### Distributed By:

Industrial Products  
5717 Salmen Street  
New Orleans, LA 70123  
Phone: 504-734-1315